
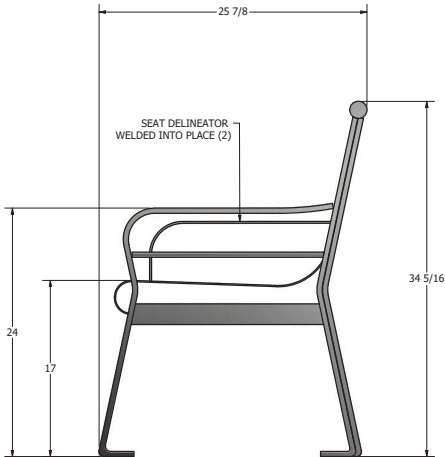
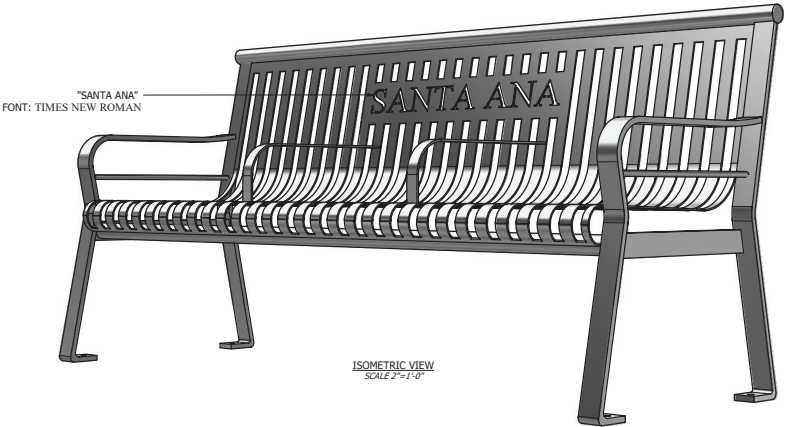
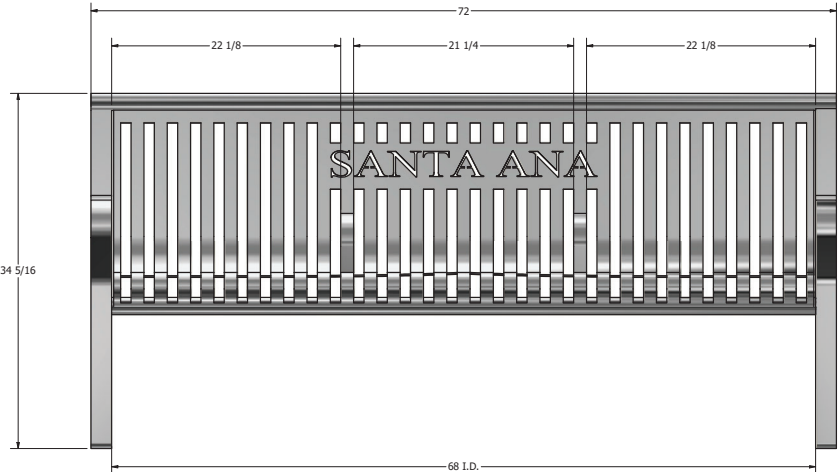


SPECIFICATIONS

EXHIBIT 1


GENERAL NOTES:

1. ALL STRUCTURAL STEEL, UNLESS OTHERWISE NOTED, SHALL BE ASTM A-36, MINIMUM YIELD STRENGTH 36,000 PSI.
2. ALL STRUCTURAL ALUMINUM MEMBERS, UNLESS OTHERWISE NOTED, SHALL BE OF ALLOY 6063-T5 OR GREATER.
3. ALL HOLES TO BE DRILLED OR PUNCHED.
4. STEEL WELDING SHALL CONFORM TO AMERICAN WELDING SOCIETY STANDARD D1.
5. ALUMINUM WELDING SHALL CONFORM TO AMERICAN WELDING SOCIETY STANDARD D1.2-08. ELECTRODES SHALL CONFORM TO AWS/SFA 5.10 CLASS ER4043.
6. ALL WELDING TO BE DONE AT TOLAR MANUFACTURING COMPANY, INC. FACILITY.
7. ALL CORPORATE PROCEDURES, INCLUDING FABRICATION, MUST BE IN COMPLIANCE WITH TOLAR MANUFACTURING CO. INC.'S QUALITY CONTROL MANUAL.
8. THE CONCRETE PAD SIZES SHOWN ARE STANDARD MINIMUM REQUIREMENTS AND ARE FOR REFERENCE ONLY. THE PAD MAY NEED TO BE REINFORCED OR ENLARGED DEPENDING ON LOCAL CODES AND LOADING CONDITIONS.

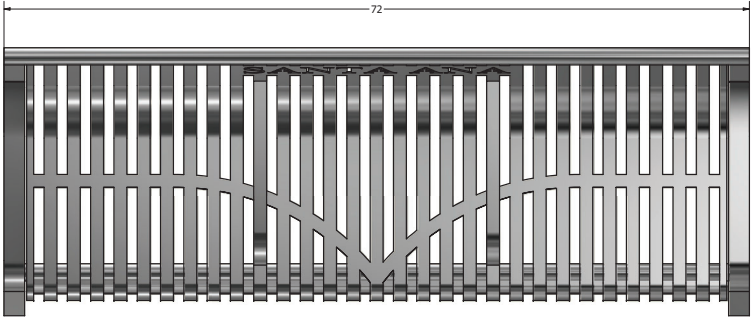


THE DESIGN AND DRAWINGS REMAIN THE INTELLECTUAL PROPERTY OF TOLAR MFG. AND ARE PROTECTED BY LAW. THEY MAY NOT BE ALTERED, REPRODUCED OR USED FOR FABRICATION WITHOUT EXPRESS WRITTEN CONSENT FROM TOLAR MFG. ALL DOCUMENTS TO BE RETURNED TO TOLAR MFG. AT COMPLETION OF WORK. CONTRACTOR TO SITE VERIFY ALL DETAILS AND DIMENSIONS AND REPORT ANY AND ALL DISCREPANCIES TO TOLAR MFG. BEFORE COMMENCING WITH THAT RELATED PORTION OF THE WORK.			
TOLAR TOLAR MANUFACTURING COMPANY, INC. 258 Marsh Circle, Corona CA, 92879			
DESCRIPTION: SANTA ANA CUSTOM STRAP BENCH			
CUSTOMER/PROJECT: SANTA ANA, CA			
SIZE: D	MATL: ALL STEEL	DWG NO: 37824-00	REV
SCALE: AS NOTED	DATE: 5/28/2020	DRAWN BY: RFarr	

T:\Inventor\Benches\37824-00.idw

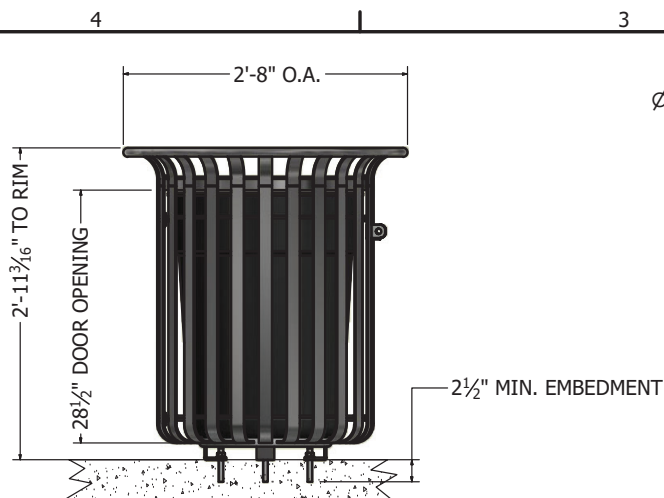


**FRONT PERSPECTIVE  
& ANCHORING DETAIL**

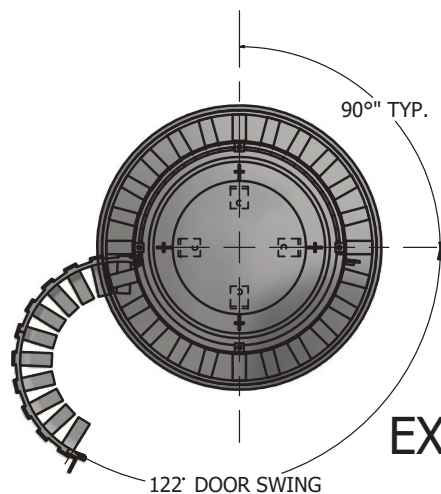


**TOP PERSPECTIVE  
& DOOR SWING DETAIL**


Ø15" WASTE DISPOSAL OPENING

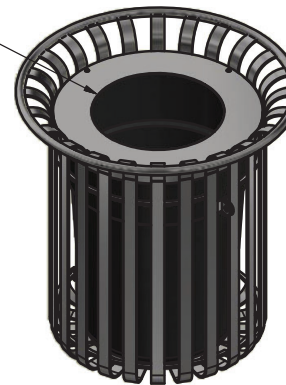

**ISOMETRIC PERSPECTIVE  
WASTE DISPOSAL OPENING DETAIL**



**LATCH (LOCK HOLE) DETAIL**



**SECTION: A-A  
LATCH RAMP DETAIL  
SLIGHTLY ANGLED DOWNWARD  
(5°) FOR EASE OF ACCESS**

CONFIGURATION A	
1	PLANT 1
2	PLANT 2

CONFIGURATION B - ANCHORS	
0	NO ANCHORS
1	1/2" X 3 3/4" SUP-R ANCHORS, ZINC
2	1/2" X 3 3/4" SUP-R ANCHORS, STN STL
3	1/2" X 4 1/4" SUP-R ANCHORS, ZINC
4	1/2" X 4 1/4" SUP-R ANCHORS, STN STL
5	1/2" X 3 3/4" HILTI TZ ANCHORS, ZINC
6	1/2" X 3 3/4" HILTI TZ ANCHORS, STN STL
7	1/2" X 4 1/2" HILTI TZ ANCHORS, ZINC
8	1/2" X 4 1/2" HILTI TZ ANCHORS, STN STL
9	SPECIAL - SPECIFIED ON SALES ORDER

CONFIGURATION C - FINISH	
0	NONE
1	STANDARD POWDER COAT
2	STANDARD POWDER COAT WITH CLEAR COAT
3	PREMIUM POWDER COAT
4	PREMIUM POWDER COAT WITH CLEAR COAT
5	TBD
6	TBD
7	TBD
8	TBD
9	SPECIAL - SPECIFIED ON SALES ORDER

**EXAMPLE:**

**3 1 8 3 6**

DRAWING NUMBER

**- 1 1 1**

CONFIGURATION A

CONFIGURATION B




CONFIGURATION C

THE DESIGN AND DRAWINGS REMAIN THE INTELLECTUAL PROPERTY OF TOLAR MFG. AND ARE PROTECTED BY LAW. THEY MAY NOT BE ALTERED, REPRODUCED OR USED FOR FABRICATION WITHOUT EXPRESSED WRITTEN CONSENT FROM TOLAR MFG. ALL DOCUMENTS TO BE RETURNED TO TOLAR MFG. AT COMPLETION OF WORK. CONTRACTOR TO SITE VERIFY ALL DETAILS AND DIMENSIONS AND REPORT ANY AND ALL DISCREPANCIES TO TOLAR MFG. BEFORE COMMENCING WITH THAT RELATED PORTION OF THE WORK.

<b>TOLAR</b> TOLAR MANUFACTURING COMPANY, INC 258 Mariah Circle, Corona CA. 92879	
DESCRIPTION 32G. TRASH CAN W/ HINGE DOOR / PADLOCK	
CUSTOMER/VENDOR RTA	PG. 1 OF 1
SIZE B	MATL. STL.
DWG NO. 32915-00	REV.
SCALE	DATE 2/14/2018
DRAWN BY: RFarr	

T:\Inventor\Trash Cans\32915-00.idw


1. ALL STRUCTURAL STEEL, UNLESS OTHERWISE NOTED, SHALL BE ASTM A-36, MINIMUM YIELD STRENGTH 36,000 PSI.
2. ALL STRUCTURAL ALUMINUM MEMBERS, UNLESS OTHERWISE NOTED, SHALL BE OF ALLOY 6063-T5 OR GREATER.
3. ALL HOLES TO BE DRILLED OR PUNCHED.
4. STEEL WELDING SHALL CONFORM TO AMERICAN WELDING SOCIETY STANDARD D1. 1-10. ELECTRODES SHALL CONFORM TO AWS 5.1, CLASS E70S-5.
5. ALUMINUM WELDING SHALL CONFORM TO AMERICAN WELDING SOCIETY STANDARD D1. 2-08. ELECTRODES SHALL CONFORM TO AWS/SFA 5.10 CLASS ER4043.
6. ALL WELDING TO BE DONE AT TOLAR MANUFACTURING COMPANY, INC. FACILITY.
7. ALL CORPORATE PROCEDURES, INCLUDING FABRICATION, MUST BE IN COMPLIANCE WITH TOLAR MANUFACTURING CO. INC.'S QUALITY CONTROL MANUAL.
8. THE CONCRETE PAD SIZES SHOWN ARE STANDARD MINIMUM REQUIREMENTS AND ARE FOR REFERENCE ONLY. THE PAD MAY NEED TO BE REINFORCED OR ENLARGED DEPENDING ON LOCAL CODES AND LOADING CONDITIONS.



T:\Inventor\Ad Boxes\Directory Assemblies\42695-00.idw

THIS DRAWING HAS BEEN GENERATED AND IS  
MAINTAINED BY A CAD SYSTEM. CHANGES  
SHALL ONLY BE INCORPORATED AS DIRECTED  
BY TOLAR MANUFACTURING CO., INC.'S  
ENGINEERING DEPT.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

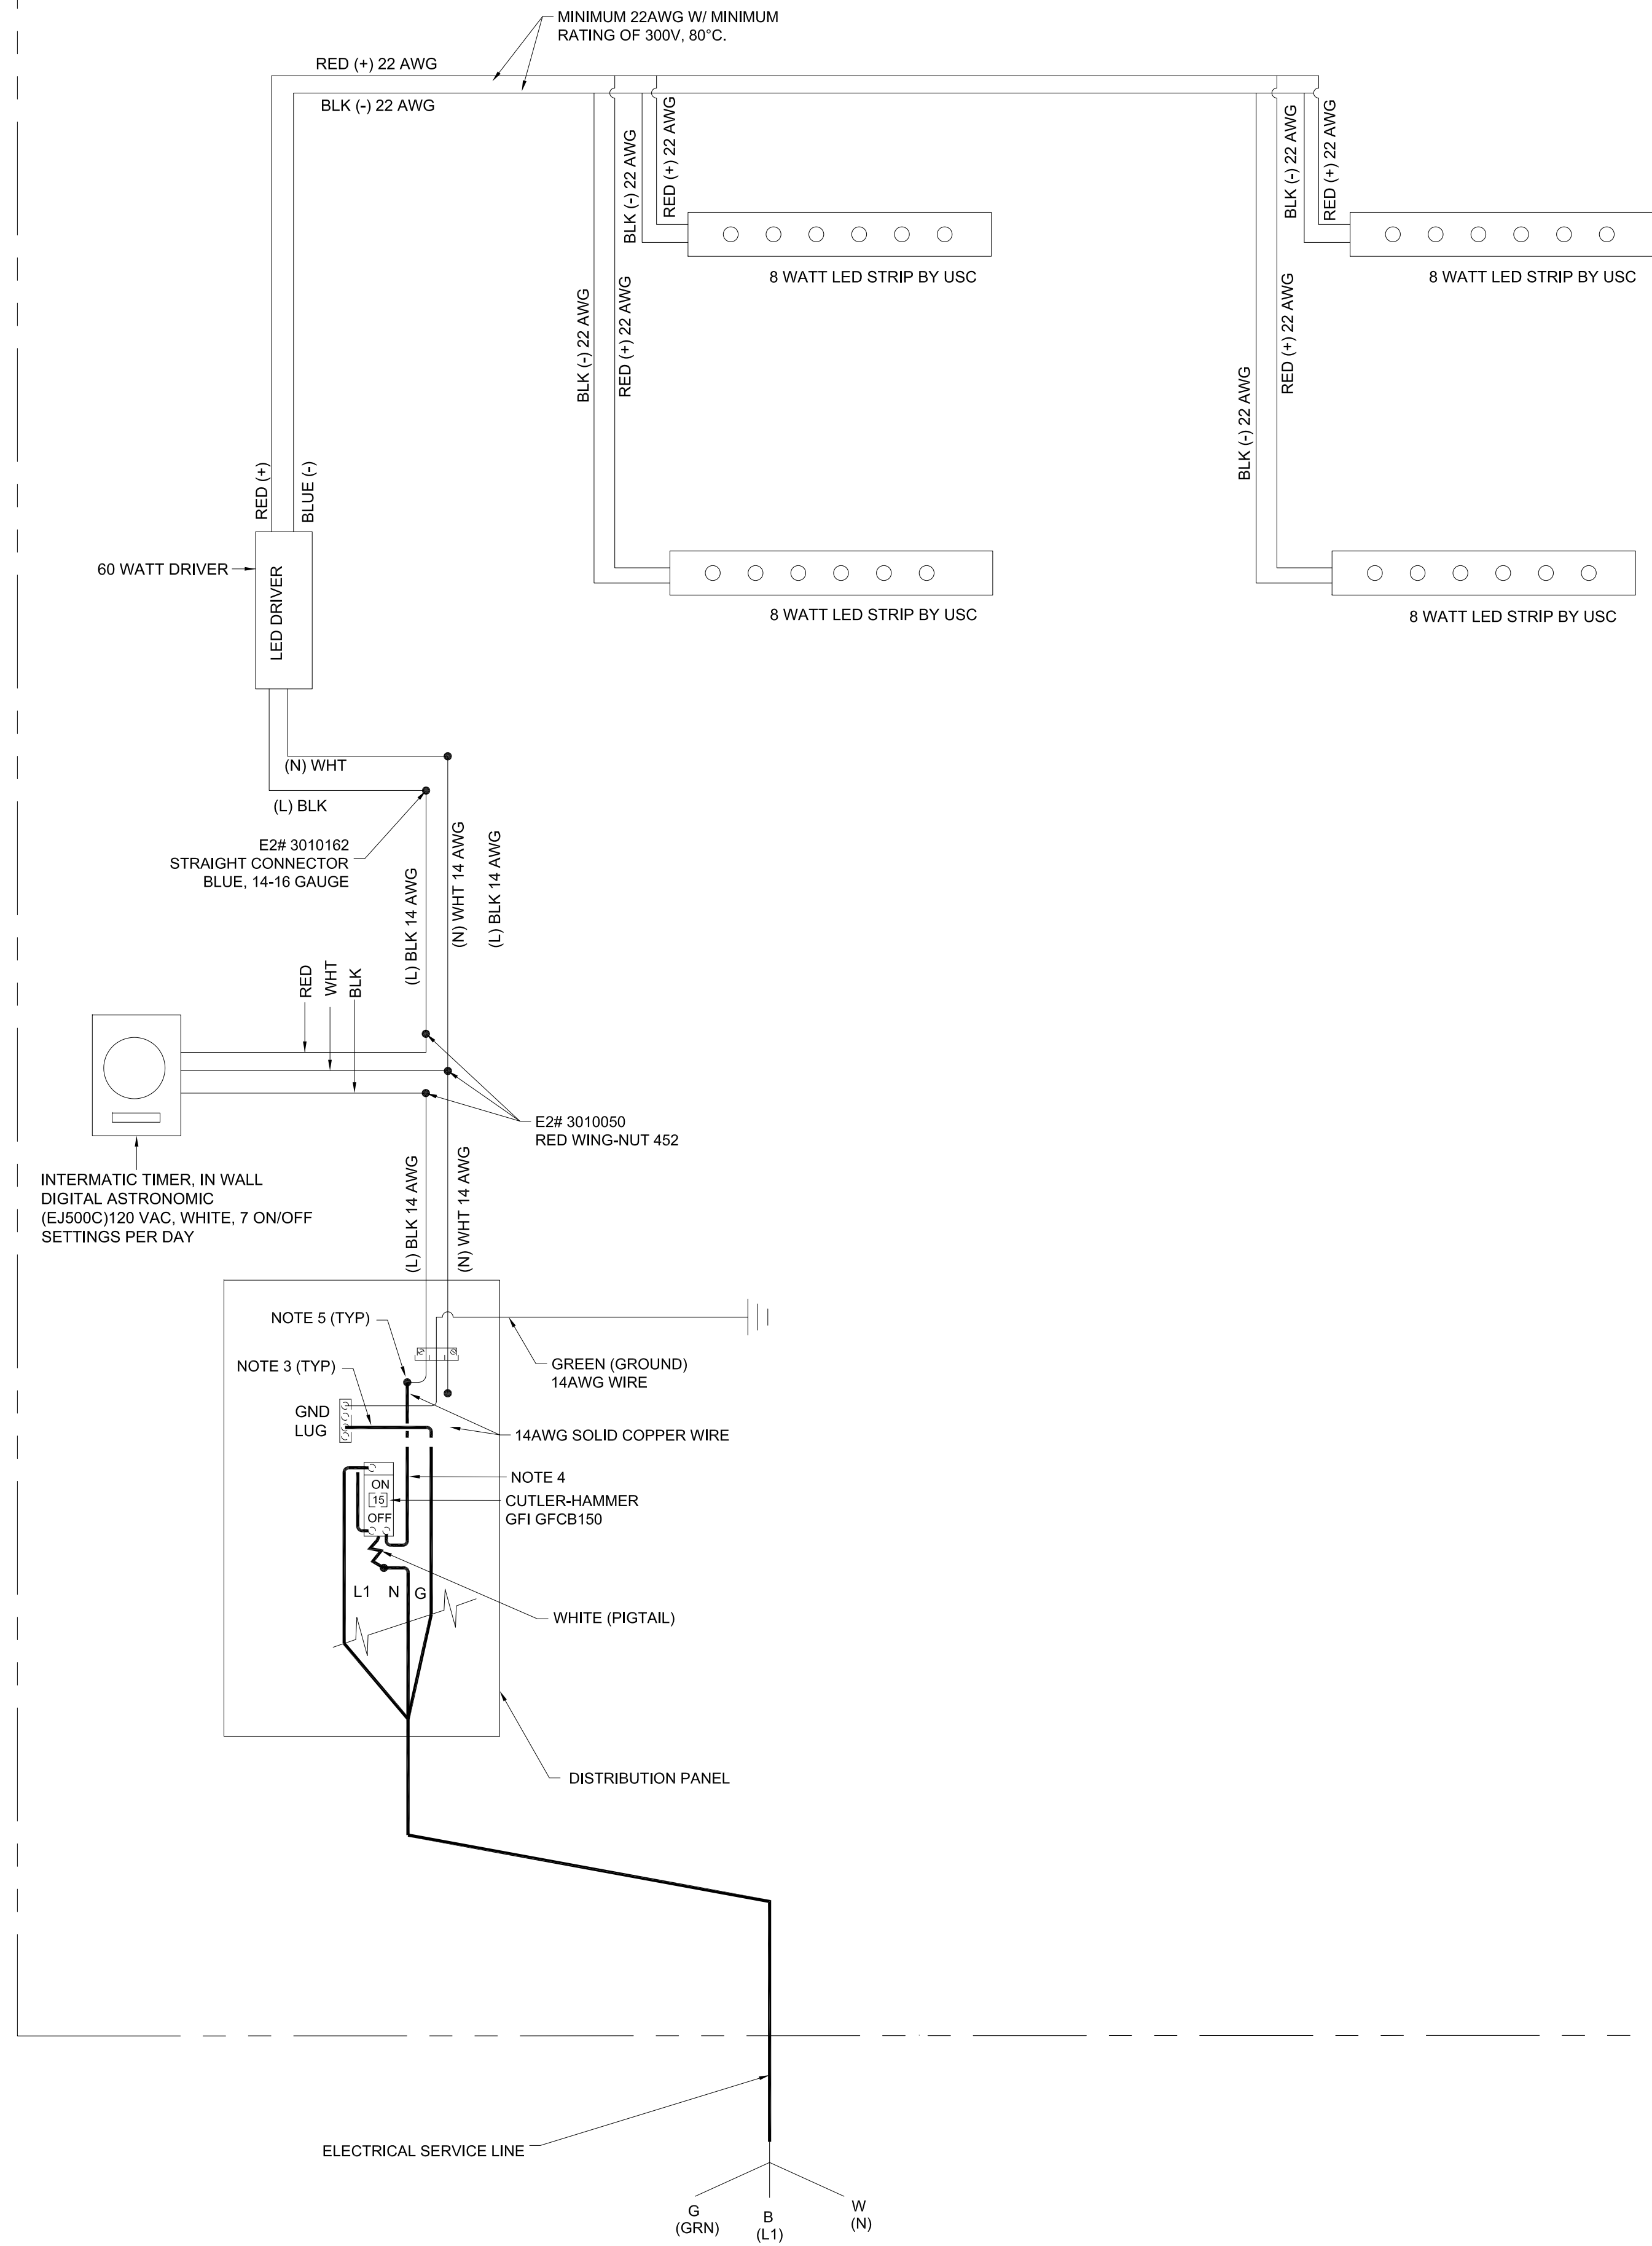


## FACTORY REQUIREMENTS

1. ELECTRICAL REQUIREMENTS ARE 120 VAC, 60 CYCLE & 390 WATT/(390 KW/HR)
2. ELECTRICAL SUPPLY SHALL BE THREE WIRE(HOT, NEUTRAL & GROUND)
3. THE GREEN INSULATED CONDUCTOR IN THE SO CORD SHALL BE USED FOR EQUIPMENT GROUNDING ONLY.
4. NEUTRAL SHALL BE INSULATED FROM GROUND AT ALL LOCATIONS INCLUDING BUS STOP SHELTER AND KIOSK.
5. USE WIRE NUT TO MAKE SPICE CONNECTION.
6. EACH ELECTRICAL DEVICE SHALL BE GROUND TO THE WELDED FIXTURE/ CHASSIS/FRAMEWORK STRUCTURE OR TO THE ADVERTISING BUS. ENSURE THAT EACH FACTORY INSTALLED ELECTRICAL DEVICE GROUNDING CONNECTION IS TO BRIGHT METAL-NO PAINT OR OTHER FINISH IS ALLOWED UNDER GROUNDING LUG OR SCREW.
7. ALL WIRING TO BE IN ENCLOSED WIREWAYS.
8. DO NOT DRILL OR TAP COLUMNS, POSTS, MOLDINGS WHICH CONTAIN ELECTRICAL CIRCUIT WIRING.

## INSTALLATION CONTRACTOR REQUIREMENTS

- A. CONTRACTOR SHALL COMPLY WITH ALL REQUIREMENTS OF NATIONAL ELECTRICAL CODE, LOCAL CODES AND THE AUTHORITY HAVING JURISDICTION.
- B. ALL MATERIALS SHALL BE NEW. ALL MATERIALS SHALL BE UL LISTED AND LABELED FOR THE INTENDED USE.
- C. CONTRACTOR SHALL PROVIDE OVER CURRENT PROTECTION NOT TO EXCEED 20A. THE PROTECTIVE DEVICE SHALL HAVE AN ARC RATING WHICH EXCEEDS THE AVAILABLE SHORT CIRCUIT CURRENT AT THE SUPPLY POINT.
- D. CONTRACTOR SHALL PROVIDE DURABLE CIRCUIT IDENTIFICATION OF THE SHELTER AT THE BRANCH CIRCUIT SUPPLY POINT.
- E. CONTRACTOR SHALL PROVIDE A DURABLE NAMEPLATE NEAR THE TOLAR RATING PLATE IDENTIFYING THE LOCATION OF THE BRANCH CIRCUIT PROTECTIVE DEVICE SERVING THE SHELTER.

 <b>Tolar Manufacturing Company, Inc.</b> 258 Mariah Circle, Corona, CA 92879				This document contains proprietary information and/or information that may be confidential to Tolar Manufacturing Company, Inc. It is not to be distributed to others for any purpose without permission from Tolar Manufacturing Company, Inc.
DESCRIPTION				
AD BOX ELEC. WITH (4) LIGHT BAR USC				
CUSTOMER/VENDOR				
SIZE	MATL.	DWG NO.	REV	
C		42695-00 ELEC	—	
SCALE	DATE	DRAWN BY:		
NONE	09/30/2021	EM		